



# 18V LITHIUM-ION GREASE GUN

## POWER

27 grease cartridges  
per battery charge

8,000 psi (552 bar)

6.0 oz (170 g)/min

## STRENGTH

Aluminum die cast  
transmission case

Glass-fiber  
reinforced nylon  
housing for superior  
strength and resistance  
to impact

## EASE OF USE

Easy to prime at low  
temperature

Durable ultra-flexible Kevlar  
reinforced hose with flashlight

Ergonomic design

Superior balance for  
less physical strain

MAXIMUM POWER. ULTIMATE RUNTIME. PRODUCTIVITY.



# 18V LITHIUM-ION GREASE GUN



## Mechanical Efficiency

- Curved slot yoke optimizes mechanical efficiency
- Piston and yoke perfectly aligned
- Motor fastened directly to housing
- Ball and needle bearings
- Aluminum die cast transmission case for optimal mechanical efficiency and durability



## Comfort

- Optimized shape, weight, and balance for comfortable grip and less physical strain



## Air Flow Management

- Patented air flow management maximizes motor and transmission life



## Battery And Stall Indicators

- Stall light indicates clogged fitting
- Battery light indicates sufficient capacity for 3 grease cartridges


# LITHIUM TECHNOLOGY

## 3X as many charges



## No Memory Effect

The battery can be charged at any time, for any length of time, without loss of capacity



## 60-minute charger


monitors the battery during the charging process to enhance battery life.



Powered by an ENERGY STAR® qualified battery charger for a better environment



## 5X less self-discharge



Lithium-ion battery can be stored for months without losing charge

## Fade-free power

Consistent level of performance




MAXIMUM POWER. ULTIMATE RUNTIME. PRODUCTIVITY.



# 18V LITHIUM-ION GREASE GUN

## INCLUDED

Part No.	Description
343151	18V Grease Gun Battery
343152	18V Grease Gun Charger (110V/60 Hz) (For model #595-A or #595-B)
343153	18V Grease Gun Charger (220V/50 Hz) (For model #595-C or #595-D)
343170	18V Grease Gun Flashlight with Clip

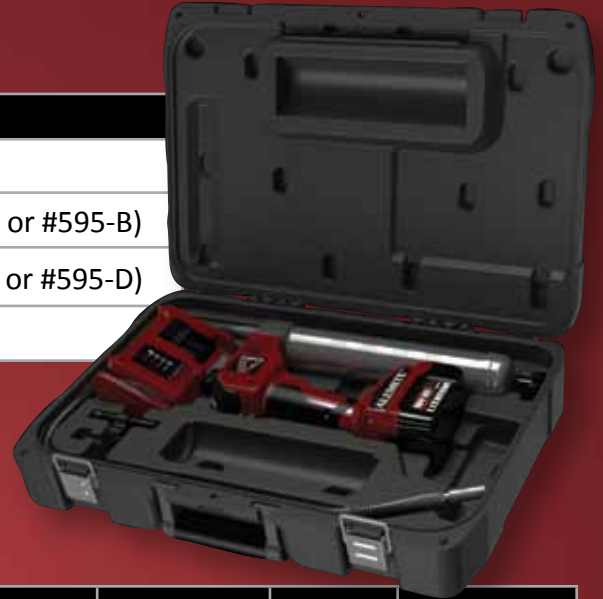

## SPECIFICATIONS

Model	Charger Input	Li-ION HD Battery			Cartridges per battery charge	Pressure	Flow Rate	Hose Length	Gun Weight (empty)
		Qty	Volts	Capacity					
595-A	110 V 60 Hz	1	18 V	3000 mAh	27	8,000 psi (552 bar)	6.0 oz/min	36 in (91 cm)	7.2 lb (3.3 kg)
595-B		2							
595-C	220 V 50 Hz	1							
595-D		2							

## ACCESSORIES

Carrying Strap	Grease Meter		Mobile Charger	Pressure Relief Valve
	oz	g		
339812	3530 + 340062	3530-A + 340062	343154	340338



1057 521 Corporate Center Drive  
Suite 100  
Fort Mill, SC 29707  
Toll Free U.S.: 866-425-3648  
Toll Free Canada: 800-267-8022  
International: 803-802-0001  
Fax U.S.: 800-648-3917  
Fax Canada: 800-267-2880  
Fax International: 803-802-0192  
www.alemite.com

LIT182 10/11

## DISTRIBUTOR INFORMATION

Cairostraat 72 - 74  
3047 BC Rotterdam  
T. 010 - 466 62 55  
F. 010 - 466 66 55  
E. info@smeertechniek.nl  
www.smeertechniek.nl

**SMEERTECHNIEK  
ROTTERDAM**

